Smart T Plus 7.8

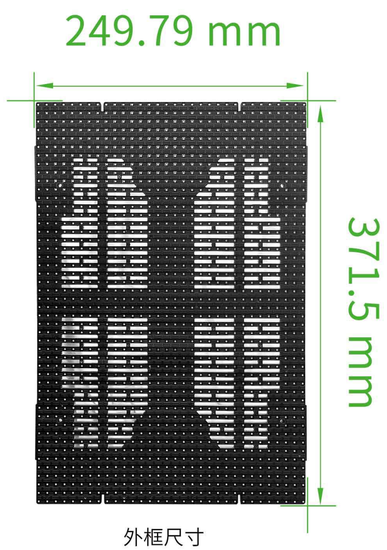

外框尺寸

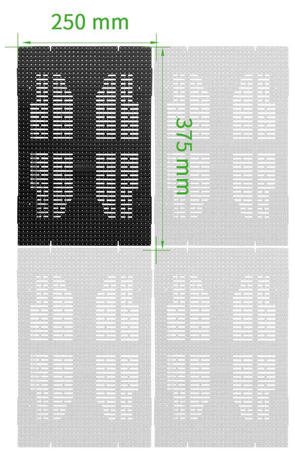

中心点尺寸

360° Transparent Foldable LED Screen		
Application Environment		Outdoor
Model		Smart T Plus（Rental/Fix installation/Led floor）
Pixel Pitch	(mm)	7.8
IP Rating		IP65(Double-sided glue filling, actual IP68)
Transparent rate		16.37%
LED Type		SMD 1921
Pixel Density	(pixel/㎡)	16384
Driving Mode		1/8
Gray Scale	(bit)	16
Max Brightness(cooper wire led)	(nits)	5000
Max Brightness(golden wire led)	(nits)	6000
Max Power Consumption (cooper wire led)	(w/㎡)	400
Max Refresh Rate	(Hz)	7680
Module Resolution	(pixels)	32 * 48
Module Size	(mm)	250 * 375
Module thickness	(mm)	15
Weight	(kg/㎡)	12
Folding Angle		360°
Viewing Angle	(H/V)	120° / 120°
Output Voltage	(V)	DC24V/48V
Input Voltage	(V)	AC100 ~ AC240
Maximum load height of single control box	(m)	20m (Multiple steel wire load-bearing)
Best Viewing Distance	(m)	≥8
Brightness adjustment (digital)	(levels)	256
Brightness adjustment (analog current)	(levels)	64-256
Contrast		2500:1
Connection Type	(Standard configuration) (Quick maintenance)	2+14pin Soldering 50pin Connector
Short Circuit Protection		Yes
Quick Maintenance		Mechanical and electrical connections available
Controlling Mode		Synchronous/Asynchronous
Installation Method		Haning / mounting / fixing / Led floor
Operation temperature	(C°)	-40 ~ 65
Operation humidity	(RH)	0% ~ 90%
Certificate		